

SRC RACK MOUNT SERIES

12" THRU 19" SIZE RANGE - PCAP TOUCH - J1900, I3/I5 CPUs

SRC Series Features:

- Size Range: 12", 15", 17", 19"
- Multi-touch PCAP Touch
- 19" Rack-mount Enclosure
- Surface Wall-mountable Also
- Intel J1900 Fanless CPU
- Intel i3/i5 CPU choices
- Integrated WiFi
- Threaded VESA Rear Mounting - 100mm
- Windows 7/10 Installed with Recovery DVD




TYPICAL I/O

Threaded
100MM VESA



Power Switch RS232 WiFi Audio In/Out LAN USB x4 (3x 2.0, 1x 3.0) VGA HDMI DC Power

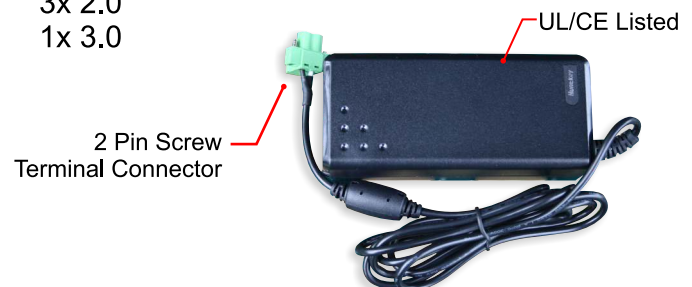

SRC RACK MOUNT SERIES

12" THRU 19" SIZE RANGE - PCAP TOUCH - J1900, i3/i5 CPUs

CPU/PC Specifications, J1900 Fanless:

	Models:	All Sizes	
PC Configuration	CPU	Inter j1900 2.0GHz	
	Chipsets	Bay Trail-M/D	
	Memory	4GB DDR3	
	Harddisk	500G HDD	
	Graphics	HD Graphics	
	Lan	RTL 8111F 1000 Lan	
	Audio	RTL ALC662	
	IO/port		1 x VGA
			1 x HDMI
			2 x RS232
		3 x USB 2.0	
		1 x USB 3.0	
		1 x RJ-45	
		1 x WIFI	

CPU/PC Specifications, i3/i5:

	Models:					
PC Configuration	CPU	Intel i3-3217U 1.8GHz	Intel i5-3337U 1.8GHz	Intel i3 6100U 2.3GHz	Intel i5 6200U 2.3GHz	
	Chipsets	Intel HM77	Intel HM77	SOC	SOC	
	Memory	4GB DDR3	4GB DDR3	4GB DDR4	4GB DDR4	
	HDD	500G HDD	500G HDD	500G HDD	500G HDD	
	Graphics	HD 4000	HD 4000	Intel HD 520	Intel HD 520	
	Lan	RTL 8111D 1000	RTL 8111D 1000	Realtek 8111F	Realtek 8111F	
	Audio	RTL ALC662	RTL ALC662	RTL ALC662	RTL ALC662	
	IO/port		1 x VGA	1 x VGA	1 x VGA	1 x VGA
			1 x HDMI	1 x HDMI	1 x HDMI	1 x HDMI
			2x RS232			
			2 x USB 2.0	2 x USB 2.0	2 x USB 2.0	2 x USB 2.0
			2 x USB 3.0	2 x USB 3.0	2 x USB 3.0	2 x USB 3.0
			1 x RJ-45	1 x RJ-45	1 x RJ-45	1 x RJ-45
		1 x WIFI	1 x WIFI	1 x WIFI		

Specifications subject to change - please inquire about critical specs before ordering

SRC RACK MOUNT SERIES

12" THRU 19" SIZE RANGE - PCAP TOUCH - J1900, I3/I5 CPUs

LCD/Touch Specifications:

		SRC-12	SRC-15	SRC-17	SRC-19
LCD	Led panel	12" LED	15" LED	17" LED	19" LED
	Aspect Ratio	4:3	4:3	5:4	5:4
	Resolution	800x600	1024x768	1280x1024	1280x1024
	Brightness	400cd/m2	300cd/m2	300cd/m2	300cd/m2
	Contrast	800:1	1000:1	1000:1	1000:1
	Display color	262K/16.2M	16.2M	16.2M	16.2M
	Surface	3H	3H	3H	3H
	Response time	20/10	35ms	35ms	35ms
	Pixel Pitch	0.3075x0.3075mm	0.297x0.297mm	0.297x0.297mm	0.297x0.297mm
	Viewing Angle	80/80/60/80	85/85/85/85	85/85/80/80	85/85/80/80
Touch Screen	Type	Capacitive touch			
	Response Time	10PT: 80Hz			
	Surface	6H			
	Durability	>300,000,000 times			
	Transparency	90%			
Enviromental	Operation temp	0C - 60C	0C - 60C	0C - 60C	0C - 60C
	Storage Temp	-20C - 80C	-20C - 80C	-20C - 80C	-20C - 80C
	Humidity	10- 95%@40C	10- 95%@40C	10- 95%@40C	10- 95%@40C
Dimension	Dimension	482 x 265.5 x 56mm	482 x 310 x 56mm	482 x 354.6 x 56mm	482 x 399 x 56mm

Specifications subject to change - please inquire about critical specs before ordering